

AL'TSHULER, M.A.; TARAN, P.N.

Increasing labor productivity in the Frunse mine. Ger.shur.no.3:
10-13 Mr '56. (MIRA 9:7)

- 1.Glavnyy inzhener rubeupravleniya imeni Frunse (for Al'tshuler).
- 2.Glavnyy inzhener trestu Leninruda (for Taran).
(Frunse--Iron mines and mining)

TARAN, P.N.

Chem

Use of butyl acetate to purify the waste liquors of aniline dye factories. A. M. Koganovskii and P. N. Taran (Inst. Gen. and Inorg. Chem. Acad. Sci. (U.S.S.R., Kiev). *Ukrain. Khim. Zhur.* 22, 401-4 (1950) (in Russian). The following partition coeffs. between BuOAc and neutral H_2O are reported: H_2OH , 30; $PhOH$, 50; $o-HOC_6H_4CO_2H$, 120; $o-H_2NC_6H_4OH$, 2.6; $p-O_2NC_6H_4OH$, 215; $o-O_2NC_6H_4OH$, 191; 2,4- $H_2N(O_2N)C_6H_3OH$, 42; $p-O_2NC_6H_4OH$, 30; $PhNH_2$, 27; $o-MeC_6H_4NH_2$, 53. Extn. with BuOAc might be used to purify waste waters, useful products being reclaimed. The soln. must be neutral or $PhNH_2$ will not be extd.

John Howe Scott

TARAN, P.N., gornyy inzhener; RYBAK-YATSENKO, A.I., gornyy inzhener.

Efficient method of developing new levels in Krivoy Rog mines.
Gor. zhur. no.7:13-15 J1 '57. (MLBA 10:8)

1. Trest Leninruda.
(Krivoy Rog--Iron mines and mining)

73-2-19/22

AUTHORS: Koganovskiy A.M., Rovinskaya T.M. and Taran, P.N.

TITLE: Oxidation of thiosulfate and sulphide in aqueous solutions on aeration in the presence of pyrolusite. (Okisleniye tiosul'fata i sul'fida v vodnykh rastvorakh pri aeratsii v prisutstvii pirolyuzita).

PERIODICAL: "Ukrainskiy Khimicheskii Zhurnal" (Ukrainian Journal of Chemistry), Vol.23, No.2, March-April, 1957, pp.256-265 (USSR).

ABSTRACT: Thiosulphate is one of the strongest oxidation inhibitors for sulphate solutions. It oxidizes on pyrolusite simultaneously with the sulphite; in the absence of pyrolusite no oxidation of the thiosulphate by air-oxygen occurs. The catalytic oxidation of dilute solutions of sulphite, thiosulphate and sulphide and their mixtures with the aid of air-oxygen is of paramount importance for the aniline-dye and oil industries (waste waters). A detailed investigation of the kinetics of the reaction showed that in the presence of pyrolusite and 30-35 minute-aeration quantitative oxidation of thiosulphate solutions is achieved (at concentrations not exceeding 50 mg-equ./l). Oxidation proceeds at a greater rate in an acid medium and at a slower rate in alkaline media

Card 1/3

13-2-19/22

Oxidation of thiosulfate and sulphide in aqueous solutions on aeration in the presence of pyrolusite. (Cont.)

(pH 11 - 12), (Diagrams 1-3). In both media the reaction is of the first order. Only 30% of sulphur passes into the sulphate, the remainder being found in the form of polythionates. The quantity of thiosulphate oxidising up to the poisoning of the pyrolusite is independent of the initial concentration of the solution is constant/unit weight for the same catalyst. Faster oxidation of sulphides by aeration in the presence of pyrolusite occurs. The main produce is thiosulphate, sulphate and a small quantity of polythionates. The oxidation of a mixture of sulphate, thiosulphate and sulphide is more intensive than the oxidation of the separate components because of the interaction of these substances amongst themselves and with the reaction products. The aeration of the solutions on pyrolusite can be utilised for the purification of sulphur-contaminated effluents of chemical plants producing organic chemicals. Experiments were carried out in a 30 mm diameter glass column filled with pyrolusite granules (480 g) previously activated with 5% H_2SO_4 . Onto this 200 ml thiosulphate solution was poured and air was

Card 2/3

73-2-19/22

Oxidation of thiosulfate and sulphide in aqueous solutions on aeration in the presence of pyrolusite. (Cont.)

bubbled through at a velocity of 127 l/hour. HCl or alkali was added to achieve changes in pH. The relation of time of practically complete breakdown of thiosulphate during the aeration of the solutions is tabulated. (Table 1). Table 2 gives the dependence of the composition of the oxidation products of thiosulphate on the pH of the solution. The effect of poisoning of the pyrolusite on the composition of the oxidation products is shown in Table 4.

There are 3 diagrams, 9 tables and 15 references, 4 of which are Slavic.

ASSOCIATION: Institute of General and Inorganic Chemistry, Academy of Sciences, Ukraine. (Institut Obshchey i Neorganicheskoy Khimii AN USSR).

SUBMITTED: June 19, 1956.

AVAILABLE: Library of Congress

Card 3/3

TARAN, P.N., Cand Tech Sci -- (diss) "Study of methods for
opening and preparing mine floors in mining ^{the} ~~ore~~ ^{of beds} ~~deposits~~ in
the Krivbass." Dnepropetrovsk, 1959, 20 pp (Min of Higher
Education UKSSR. Dnepropetrovsk, ~~20000000~~ Order of Labor
Red Banner Mining Inst in Artem) 100 copies (PL, 36-49, 116)

- 55 -

NOVOZHILOV, M.G., prof., doktor tekhn.nauk; KUCHERYAVYY, F.I., kand.tekhn.nauk;
nauk; TARAN, P.N., kand.tekhn.nauk

"Boring and blasting operations" by V.V.Nedin, Sh.I.Ibraev.
Reviewed M.B.Novoshilov, F.I.Kucheriavyi, P.N.Taran. Gor.
zhur. no.2:77-78 F '61. (MIRA 14:4)

1. Dnepropetrovskiy gornyy institut (for Kucheryavyy). 2. Trest
Leninruda, Krivoy Rog (for Taran).
(Boring) (Blasting) (Nedin, V.V.)
(Ibraev, Sh.I)

TARAN, P.N., kand.tekhn.nauk

Consolidated data on tapping and developing horizons in
mines of the Krivoy Rog Basin. Gor. zhur. no.10:43-45
0 '61. (MIRA 15:2)

1. Glavnyy inzh. tresta Leninruda.
(Krivoy Rog Basin--Iron mines and mining)

KHIVRENKO, A.F.; TARAN, P.N.

Increasing the output and improving the quality of iron ores of the Krivoy Rog Basin. Gor. zhur. no.11:5-6 N '61. (MIRA 15:2)

1. Glavnyy inzh. tresta Dzerzhinskruda (for Khivrenko). 2. Ispolnyayushchiy obyazannosti upravlyayushchego trestom Leninruda (for Taran).

(Krivoy Rog Basin--Iron mines and mining)

BUD'KO, A.V.; BOGDANOV, G.I.; TARAN, P.N.; LEVITSKIY, D.Z.

Study and improvement of chamber systems with mass pillar caving
in the Krivoy Rog Basin. Gor.zhur. no.4:24-29 Ap '62.

(MIRA 15:4)

1. Institut gornogo dela im. Skochinskogo (for Bud'ko, Bogdanov).
2. Trest Leninruda, Krivoy Rog (for Taran, Levitskiy).
(Krivoy Rog Basin---Iron mines and mining)

TARAN, P.N., kand.tekhn.nauk (Krivoy Rog); MIKHAYLOV, Yu.I., kand.tekhn.
nauk (Krivoy Rog); SIMFOROV, G.Ye., gornyy inzh. (Krivoy Rog)

Improving methods of tapping ore deposits at great depths.
Gor.zhur. no.5:23-25 My '62. (MIRA 16:1)
(Krivoy Rog Basin--Iron mines and mining)
(Conveying machinery)

TARAN, P.N., kand.tekhn.nauk; MIKHAYLOV, Yu.I., kand.tekhn.nauk

Complete automation of mine haulage. Gor. zhur. no.12:21-25
D '62. (MIRA 15:11)

(Mine haulage) (Automation)

TARAN, Pavel Nikiforovich; TARASOV, L.Ya., otv. red.; YEROKHIN,
G.M., red. izd-va; LAVRENT'YEVA, L.G., tekhn. red.;
IL'INSKAYA, G.M., tekhn. red.

[Practice of opening up and developing horizons in working
ore deposits] Opyt vskrytiia i podgotovki gorizontov pri
razrabotke rudnykh mestorozhdenii. Moskva, Gosgortekhzdat,
1963. 50 p. (MIRA 16:5)
(Krivoy Rog Basin--Mining engineering)

LESEN, P.N., kand. tekhn. nauk; VOL'FSON, P.M., kand. tekhn. nauk; VOL'DIN,
A.P., kand. tekhn. nauk; TOSTER, Yu.B., gornyy inzh.

Eliminate multiple horizon mining in the Krivoy Rog Basin.
Gor. zhur. no.4:3-6 Ap '65.

(MIRA 18:5)

1. Nauchno-issledovatel'skiy gornorudnyy institut, Krivoy Rog.

KOGANOVSKIY, A.M.; TARAN, P.N.

Oxidation of sulfite aqueous solutions by aeration. Ukr.khim.zhur.
21 no.4:472-479 '55. (MLRA 9:2)

1. Institut neorganicheskoy khimii AN USSR.
(Sodium sulfites) (Factory and trade waste) (Oxidation)

KOGANOVSKIY, A.M.; TARAN, P.M.

Use of butyl acetate in the purification of aniline-dye industrial effluents. Ukr.khim.shur.22 no.3:401-404 '56. (MIRA 9:9)

1. Institut obshchey i neorganicheskoy khimii AN USSR.
(Butyl acetate) (Coal-tar colors)

KOGANOVSKIY, A.M.; ROVINSKAYA, T.M.; TARAN, P.N.

Oxidation of thiosulfate and sulfide in aqueous solutions of
mercuric ion in the presence of pyrolusite. Ukr. khim. zhur. 23 no. 3:
257-265 '57. (MLBA 10:5)

1. Institut obshchey i neorganicheskoy khimii Akademii nauk U.S.S.R.
(Oxidation) (Sulfides) (Thiosulfates)

BEKHER, P.M.; KOGANOVSKIY, A.M.; KRAYUKHINA, N.N.; MYSHKINA, N.P.; TARAN,
P.N.; TROYANOV, I.A.; SHEYN, S.M.

Adsorption removal of aromatic compounds from the waste waters of
aniline dye production. Ukr. khim. zhur. 27 no.2:268-273 '61.

(MIRA 14:3)

1. Institut obshchey i neorganicheskoy khimii AN USSR i Rube-
zhanskiy filial Nauchno-issledovatel'skogo instituta organi-
cheskikh poluproduktov i krasiteley.

(Salvage(Waste, etc.))

(Aromatic compounds)

SHEVCHENKO, M.A.; TARAN, P.N.

Study of the basic components of humus in water. Gidrokhim. mat.
35:149-155 '63. (MIRA 16:7)

1. Institut obshchey i neorganicheskoy khimii AN UkrSSR i
Laboratoriya khimii tekhnologii vody, Kiyev.
(Humus--Analysis) (Water--Composition)

TARAN, Kaisa traktoristka; SOSNITSKAYA, Vera [Sosnyts'ka, Vira];
GAYDUK, Mykola [Haiduk, Mykola], zvenevoy; SERDYUK, Tonay, zvenevaya

Beacon light of the glory of the Communist Youth League. Znan.
ta pratsia no. 4:6-7 Ap '62. (MIRA 15:4)

1. Rudgosp "Kermenchik" Velikonovosii'kivs'kogo rayonu Donetsk'koï oblasti (for Taran). 2. Zaviduyucha bibliotekoyu, sekretar komsomol's'koï organizatsii kolgospu im. Dzerzhinsk'kogo Kharkiv's'kogo rayonu Volins'koï oblasti (for Sosnitskaya). 3. Komsomol's'koye molodizhna lanka kolgospu im. XX z'izlu KPS Malodivits'kogo rayonu Chernigivs'koï oblasti (for Gayduk). 4. Uchnivs'ka virobna chaya brigada Skorodistits'koï seredn'oi shkoli Chornobivits'kogo rayonu na Cherkashchini (for Serdyuk).
(Ukraine: Corn (Hilze))

TARAN, S.A.; GORBATENKO, V.G.

Automatic machine for straightening and cutting copper busbars.
Bul.tekh.-ekon.inform.Gos.nauch.-issl.inst.nauch.i tekh.inform.
17 no.7:45-46 J1 '64. (MIRA 17:10)

1. "ARAI" T.V.
2. USSR (600)
4. Ukraine-Wheat
7. Scientific practices in spring wheat cultivation in the steppes of the Ukrainian SSR, Sov.agron. 11 no.2, 1953.
9. Monthly List of Russian Accessions, Library of Congress, April 1953, Uncl.

TARAN, V., inzhener.

Unusual aircrafts. Tekh. mol. 24 no.12:30-32 D '56.

(MLRA 10:2)

(Flying machines)

TARAN, V. ingh.

Mail by rockets. IUn. tekhn. 2 no.9:33 8 '57.

(MLRA 10:9)

(Rockets (Aeronautics)) (Postal service)

PLANE 1 BOOK REVOLUTION 809/5213

Abdumalikovich BSR. Mesodimensionalnyi konstitut po provedeniyu Mesodimensionalnogo
geofizicheskogo guda. V. model'noy programy MGI. Moscow.

Iskonnennyye mesodimensionalnyye konstitut (Investigations of Inhomogeneities
in the Ionosphere) Moscow, Izdatel'stvo AS SSSR, 1960. 96 p. 2,000 copies printed.
(Series: Raschetnaya shkola, No. 4)

Smirnov, E.M. Yu.Ye. Rubinshteyn and S.P. Mironov, Candidate of Physics and Mathematics,
Moscow. Yu.Ye. Rubinshteyn; Tech. Ed.: O.M. Giv'arov.

REMARKS: This publication is intended for geophysicists. It will be of particular
interest to researchers specializing in studies of the structure of the ionosphere
and its effect on radio wave propagation.

CONTENTS: This collection of articles on the properties of inhomogeneous ionospheric
waves published by the IUT Committee of the AS USSR, as the fourth serial contribution
to the fifth section of the IUT program (the ionosphere). Individual articles
deal with various types of inhomogeneous ionospheric waves and their drifts, a study
of the state of polarization, and a method of correlation analysis of the measure-
ments of inhomogeneities and drifts in the ionosphere. No personalities are men-
tioned. References follow individual articles. A brief English abstract is
appended to each article.

TABLE OF CONTENTS:

| | |
|---|----|
| Foreword | 3 |
| Gusev, V.D., and S.P. Mironov. Correlation Analysis Applied to Media With Three-Dimensional Characteristics | 7 |
| Mironov, S.P. Three-Dimensional Characteristics of the Inhomogeneities in the Ionosphere | 20 |
| Gusev, V.D., and Yu.Ye. Rubinshteyn. Displacement of Disturbances in the F2 Layer | 36 |
| Rubinshteyn, Yu.Ye., and V.D. Gusev. Anisotropy of the Form of Small-Scale Inhomogeneities and Their Movement in the F2 Layer | 45 |
| Mironov, S.P., Yu.Ye. Rubinshteyn, and V.D. Gusev. The Movement of Different Scale Inhomogeneities in the Ionosphere | 57 |
| Pavlov, V.I. The Drift of Inhomogeneous Inhomogeneities According to Observations in Keston-on-Don | 70 |
| Rubinshteyn, Yu.Ye., and V.D. Gusev. Drift of Small-Scale Inhomogeneities in the Ionosphere (According to Measurements in Irkutsk) | 75 |
| Pavlov, V.I. The Measurement of Drifts in the Ionosphere With Simultaneous Polarization of the State of Polarization | 85 |
| Rubinshteyn, Yu.Ye. Criteria for the Applicability of Correlation Analysis | 92 |

AVAILABILITY: Library of Congress

24/000/000
7-501

Card 3/3

S/024/62/000/003/009/011
E140/E463

16,8000

AUTHORS: Yemel'yanov, S.V., Taran, V.A. (Moscow)

TITLE: On a class of automatic control systems with variable structure

PERIODICAL: Akademiya nauk SSSR. Izvestiya. Otdeleniye tekhnicheskikh nauk. Energetika i avtomatika, no.3, 1962, 183-188

TEXT: The author refers to A.M.Letov's demonstration (Avtomatika i telemekhanika, v.18, no.7, 1957) that the quality of an automatic control system can be improved substantially by change of sign of the controller velocity at a certain instant of time chosen so that the generating point in the phase space finds itself on a certain hyperplane, with absence of motion corresponding to a real positive root. Unfortunately present technical possibilities do not permit such systems to be realized and inexactness in determining the instant of switching leads to instability. The author seeks a similar system, having the advantages of conditionally stable systems, without their disadvantages. It is necessary to select a switching hyperplane

Card 1/2

B

On a class of automatic ...

S/024/62/000/003/009/011
E140/E463

such that it pass through the origin of coordinates, be sufficiently close to the Letov hyperplane and with the phase velocity vectors in its vicinity everywhere directed towards it. Then the generating point will move in slipping mode on the hyperplane and with small deviations away from it will always return to it. In such cases the quality of transient processes will be almost that of the conditionally stable system without the need for exact incidence of the generating point on the hyperplane. The author considers successively stability over the entire hyperplane and the conditions of incidence on the hyperplane for arbitrary initial conditions. B

SUBMITTED: March 20, 1962

Card 2/2

9.3280

S/103/63/024/001/003/012
D201/D308

AUTHORS: Yemel'yanov, S. V. and Taran, V. A. (Moscow)

TITLE: Lag networks in the design of a class of automatic control systems with variable structure. I

PERIODICAL: Avtomatika i telemekhanika, v. 24, no. 1, 1963, 33-46

TEXT: The authors show, on the example of control of a neutral object by means of a regulator with zero position error, that the system can be stabilized by replacing the differentiating units by lag networks: they also analyze such a system by representing its motion in a three-dimensional phase space x, \dot{x}, θ and by its projections on planes $x\dot{x}$ and $x\theta$ (where θ is the signal at the input of the lag network). In the system analyzed the switching network (Ψ - network) is that suggested by S. V. Yemel'yanov (Avtomatika i telemekhanika, v. 20, no. 7, 1959). The theoretical analysis of the motion for arbitrary initial conditions makes it possible to determine the parameters of the lag network as dependent on the parameters of the system. The analysis of the motion in the three-

Card 1/2

Lag networks in ...

S/103/63/024/001/003/012
D201/D308

dimensional phase space allows further recalculation of the lag network parameters if optimum transient is to be achieved. There are 11 figures. VB

SUBMITTED: April 23, 1962

Card 2/2

S/280/63/000/001/016/016
E140/E435

AUTHORS: Yemel'yanov, S.V., Taran, V.A. (Moscow)

TITLE: A method for stabilizing automatic control systems with alternating (variable) structure without use of the error signal derivatives

PERIODICAL: Akademiya nauk SSSR. Izvestiya. Otdeleniye tekhnicheskikh nauk. Tekhnicheskaya kibernetika. no.1, 1963, 155-171

TEXT: The systems studied have two different corrective filters depending on the sign of the error signal. The system studied in the present note is of second order and it is shown that the use of switched inertial linear filters gives results similar in quality to those obtained with other types of structure variation, without use of the first derivative of the error signal in the control function. Relations are obtained for the establishment of the filter parameters. If the filter time constant is reduced the system dynamics are improved but the switching system must be more sensitive. The system can realize transients without overshoot or with a single overshoot. The range of initial

Card 1/2

L 4696-63

A method for stabilizing ...

S/280/63/000/001/016/016
E140/E435

conditions for which no overshoot occurs can be as great as in systems with derivative control. There are 9 figures.

SUBMITTED: June 12, 1962

lt/nd
Card 2/2

11 700

S/103/63/024/002/008/020
D201/D308

AUTHORS: Yemel'yanov, S.V. and Taran, V.A. (Moscow)
TITLE: Application of lag elements to the design of a class
of variable structure regulators. II

PERIODICAL: Avtomatika i telemekhanika, v. 24, no. 2, 1963,
193-201

TEXT: The authors consider: 1) the choice of parameters of
the lag element producing not more than one overshoot at any initial
conditions, 2) the possibility of extending the range of initial con-
ditions with no overshoot in the system, and 3) the monotonicity of
the transient. Conclusions: 1) In designing automatic regulators of
variable structure it is possible to use the error signal as trans-
formed by either a lag or a lagless element. The parameters of the
lag element have to satisfy certain conditions derived in part I and
II of the work. 2) A decrease of the time constant of the lag ele-
ment imposes the system dynamics but requires a more sensitive switch-
ing arrangement. 3) It is possible, depending on initial conditions,
Card 1/2

Application of lag elements ...

S/103/63/024/002/008/020
D201/D308

to design a system either with a monotonic transient or with one overshoot only. The range of initial conditions for which the response has no overshoots may be extended if the switching is controlled either by the error itself or by its derivative. All results were checked on IPT-5 (IPT-5) analog computer and proved to be in agreement with the theoretical analysis. There are 5 figures and 1 table. *1A*

SUBMITTED: May 26, 1962

Card 2/2

YEMEL'YANOV, S.V. (Moskva); TARAN, V.A. (Moskva)

Addition to E.I. Gerashchenko's article. Izv. AN SSSR.
Tekh. kib. no.4:164 J1-Ag '63. (MIRA 16:11)

YEMEL'YANOV, S.V. (Moskva); TARAN, V.A. (Moskva)

Use of commutating phase-shifting filters in an automatic
control system with variable structure. Izv. AN SSSR. Tekh.
kib. no.5:164-170 S-O '63. (MIRA 16:12)

BRUDNIK, S.S.; TARAN, V.A.

Practical methods for the determination of optimum reliability. Pri-
borostroenie no.7:23-25 JI '63. (MIRA 16:9)

SHIRYAYEV, V.I.; TARAN, V.A.; CHETININ, E.A.; MYSOVSKIY, V.S., dots.
kand. tekhn. nauk, recenzent

[Principles of automation in foundry practice and the
control and measurement equipment] Osnovy avtomatizatsii
liteinogo proizvodstva i kontrol'no-izmeritel'nye pribory.
Moskva, Mashinostroenie, 1964. 154 p. (MIRA 17:12)

1. Moskovskiy avtomekhanicheskiy institut (for Mysovskiy).

TARAN, V.A. (Moskva)

Use of nonlinear correction and variable structure for improving the
dynamic properties of automatic control systems. Avtom. i telem. 25
no.1:140-149 Ja '64. (MIRA 17:2)

ACCESSION NR: AP4041463

S/0103/64/025/006/0881/0886

AUTHOR: Yemel'yanov, S. V.; Taran, V. A. (Moscow)

TITLE: Stabilising ^{the} variable-structure automatic-control system by inertial units with a variable time constant

SOURCE: Avtomatika i telemekhanika, v. 25, no. 6, 1964, 881-886

TOPIC TAGS: automatic control, automatic control theory, variable structure automatic control

ABSTRACT: In the authors' previous works (referenced in the article), it was shown that instead of using an error-signal derivative, the error signal may be transformed by an inertial (relaxation) unit, the time constant T of the unit being limited by stability and transient-response conditions. Shortening the time constant makes the system more sensitive to the variation of parameters of the correcting units. The limitations imposed on T can be alleviated by step-changing

Card 1/2

ACCESSION NR: AP4041463

the transfer factor of the inertial unit simultaneously with changing the system structure. In the present article, another correction method is suggested for desensitizing an automatic-control system. This method involves a step-changing of the time constant T of the inertial unit. The dynamics of a second-order free-migrating system is investigated. The domain of existence and the equation of motion of the sliding mode are considered, as well as conditions of stability and aperiodic motion. The step-time-constant method is recommended for the case when $1 - \lambda T > 0$ (with high values of λ) is the fundamental limitation. For the general case, a switching of both the gain and the inertial-unit time constant is recommended. Orig. art. has: 3 figures and 34 formulas.

ASSOCIATION: none

SUBMITTED: 00

ENCL: 00

SUB CODE: DP, IE

NO REF SOV: 003

OTHER: 000

Card 2/2

L 16104-65 EWT(d)/EPF(n)-2/ENP(1) Po-l/Pq-l/Pg-l/Pae-2/Pu-l/Pk-l/P1-l
IJP(c)/ESD(dp)/AEBC(a)/SSD/ASD(a)-5/AFMDC/AFETR/AFTC(p)/RAFM(a) WH/BC

ACCESSION NR: AP4047573

S/0103/64/025/010/1421/1432

AUTHOR: Taran, V. A. (Moscow) B

TITLE: Controlling a linear plant by a variable-structure astatic controller without using pure derivatives in the control law. Part 1

SOURCE: Avtomatika i telemekhanika, v. 25, no. 10, 1964, 1421-1432

TOPIC TAGS: automatic control, automatic control design, automatic control system, automatic control theory 9

ABSTRACT: The response of a 3rd order automatic-control system to a step signal and some features of the system motion are considered; the structure of the phase space is investigated. The possibility of using inertial units instead of differentiating units is demonstrated. These findings are formulated: (1) When inertial-differential-unit signals, instead of pure derivatives, are used in a logical system, the phase trajectory is represented by a broken line consisting of

Card 1/2

L 16404-65

ACCESSION NR: AP4047573

segments of the trajectories of the first and second structures; (2) Beginning from a certain moment, the state point will travel in the vicinity of the A-hyperplane; (3) When the inertia of the differentiators decreases, the phase trajectory contracts toward the A-plane until a sliding motion in the A-plane takes place; (4) This sliding motion must be stable in order to ensure the stability of the system; (5) Meeting the conditions for bringing the state point into the sliding plane and the condition of stable motion in the sliding plane (if the latter registers with the A-plane) ensures placement of the state point in the A-plane under any initial conditions. Orig. art. has: 2 figures and 68 formulas.

ASSOCIATION: none

SUBMITTED: 10Jun63

ENCL: 00

SUB CODE: IE

NO REF SOV: 005

OTHER: 000

Card 2/2

L 17552-65 EWT(d)/EPF(n)-2/EWP(1) Po-4/Pq-4/Pg-4/Pae-2/Pu-4/Pk-4/Pl-4 SSD/
AEDC(a)/AFMD(c)/ASD(a)-5/AFETR/AFTC(p)/RAEM(a)/RAEM(d)/ESD(dp)/IJP(c) WW/BC

ACCESSION NR: AP5000148

S/0103/64/025/011/1558/1565

AUTHOR: Taran, V. A. (Moscow)

B

TITLE: Controlling a linear plant by a variable-structure astatic controller without using pure derivatives in the control law. Part 2

SOURCE: Avtomatika i telemekhanika, v. 25, no. 11, 1964, 1558-1565

TOPIC TAGS: automatic control, automatic control design⁹, automatic control system, automatic control theory

ABSTRACT: The behavior of the state point in the vicinity of an A-hyperplane and the state point's falling into the pull-in region are theoretically investigated. As the phase trajectories are included in a region of space bounded by two planes, stability conditions of the system are explored. The behavior of an equivalent on-off system under self-oscillation conditions is analyzed. Finally, conditions of a minimum number of overcontrols are determined: free oscillations of the filter must decay more quickly than the partial transient process which corresponds to

Cord 1/2

L 17552-65

ACCESSION NR: AP5000148

the least root of equation 1.1 with $U = U_1$ or $U = U_2$ (see V. A. Taran in "Avt. i Telemekhanika, v. 25, no. 10, 1964). Orig. art. has: 1 figure and 41 formulas.

ASSOCIATION: none

SUBMITTED: 26Jul63

ENCL: 00

SUB CODE: IE

NO REF SOV: 003

OTHER: 000

L Card 2/2

BRUDNIK, S.S., inzh.; KUSOV, I.F., inzh.; TARAN, V.A., kand. tekhn. nauk

Using computers for calculating optimum allowances for the parameters of an executive component in securing given reliability and minimum cost of production and operation. Priborostroenie no.4: 16-19 Ap '65. (MIRA 18:5)

L 60394-65 ENT(d)/ENP(v)/ENP(k)/ENP(h)/ENP(l) Pf-4

ACCESSION NR: AP5016976

UR/0280/65/000/003/0132/0138

AUTHOR: Yemel'yanov, (Moscow); Taran, V. A. (Moscow); Utkin, V. I. (Moscow)

TITLE: The coincidence of representative points with the glide plane in systems with variable structure

SOURCE: AN SSSR. Izvestiya. Tekhnicheskaya kibernetika, no. 3, 1965, 132-138

TOPIC TAGS: variable structure system, glide plane motion, third order variable structure, optimum dynamic control, control theory

ABSTRACT: A third-order automatic control system with variable structure is discussed. It is assumed that within the phase space of the system's coordinates, there is a certain plane whose every point corresponds to gliding operation and that during such gliding motion of the system it exhibits remarkable dynamic properties. Consequently, to achieve a control which has the required quality indices, one must continuously secure the gliding operation of the system. The present paper formulates (in the form of a theorem) and proves the necessary conditions which must be satisfied in order that the representative point will remain located within the glide plane for arbitrary initial conditions. Orig. art. has: 36 formulas and 1 figure.

Card 1/2

L 60394-65

ACCESSION NR: AP6010076

ASSOCIATION: None

SUBMITTED: 24Dec63

ENCL: 00

SUB CODE: IE

NO REF SOV: 004

OTHER: 000

0

Card

2/2

L 2401-66 EWT(d)/EPF(n)-2/EWP(v)/EWP(k)/EWP(h)/EWP(l) IJP(c) WW/BC

ACCESSION NR: AP5022973

UR/0103/65/026/008/1336/1347
62-501:519.25

57
03

AUTHOR: Bermant, M. A. (Moscow); Yemel'yanov, S. V.; Taran, V. A. (Moscow)

TITLE: The motion of variable structure systems under sliding conditions

SOURCE: Avtomatika i telemekhanika, v. 26, no. 8, 1965, 1336-1347

TOPIC TAGS: phase shifter, filter, automatic control system, automatic control design

ABSTRACT: Numerous papers have dealt in recent years with variable-structure automatic control systems in which the structure and regulator parameters vary in accordance with a chosen law as a function of the state of the system. Such systems (as well as those with discontinuously varying parameters) are capable of operating under sliding conditions. The present paper develops a general approach to the study of the dynamics of systems with variable structural analysis of systems with infinite amplifications and of relay systems developed by M. V. Meyero (Sintez struktur sistem avtomaticheskogo regulirovaniya vysokoy tochnosti, Fizmatgiz, 1959) and Ya. Z. Tsypkin (Teoriya relevnykh sistem avtomaticheskogo regulirovaniya, Gostekhizdat, 1955). The authors discuss the choice of the

Card 1/2

L 2401-66

ACCESSION NR: AP5022973

switching function, the structural transformation of systems with variable structure; the equations of motions of such systems under sliding conditions, the existence conditions for sliding operations, the independence of the sliding motion of the systems on the parameters of the object, the use of switching phase-shifting filters, the transformation of the structure of the switching filters, the conditions for the existence of the sliding operation of systems with variable parameters containing switching filters, and the types of transient processes during sliding operation. Results show that the use of structural transformation methods, based on the analogy between the systems with variable structure and relay systems under sliding conditions, leads to a significantly simplified treatment of the variable systems under sliding conditions. Orig. art. has: 71 formulas and 4 figures,

ASSOCIATION: None

SUBMITTED: 18Mar64

ENCL: 00

SUB CODE: IE

NO REF SOV: 012

OTHER: 000

CC

Card 2/2

BERMAN, M.A. (Moskva); VARAN, V.A. (Moskva)

... of a system with variable structure in a sliding
mode. Avtom. i telem. Zh. no.8. 1966-1967. Apr '65.

(MIRA 18:11)

TARAN, V.A. (Moskva)

Construction of automatic control systems using switched phase
shifting filters. Izv. AN SSSR. Tekh. kib. no.4:174-182 J1-
Ag '65. (MIRA 18:11)

L 21977-66 EWP(k)/EWT(a)/EWP(h)/EWP(1)/EWP(v)

ACC NR: AP6007860

SOURCE CODE: UR/0103/66/000/002/0049/0055

AUTHOR: Taran, V.A. (Moscow)

ORG: none

TITLE: Linear plant control by means of a variable-structure astatic control without the use of "pure" derivatives in control law. Part 3

SOURCE: Avtomatika i telemekhanika, no. 2, 1966, 49-55

TOPIC TAGS: linear automatic control, automatic control theory, automatic control system

ABSTRACT: This article is an extension of results obtained in Parts 1 and 2 (Avtomatika i telemekhanika, v. XXV, no. 10, 1964; Avtomatika i telemekhanika, v. XXV, no. 11, 1964) to systems of the n-th order, i.e., an investigation of the influence of the inertia of differentiators on the dynamics of the variable-structure control system and the selection of the control law. It is found that for the design of highly efficient variable-structure automatic control systems use can be made of signals from passive filters and inertia differentiators instead of the effects from error derivatives. The properties of

Card 1/2

UDC: 62-50:619.25

L 21977-66

ACC NR: AP0007800

0

real variable-structure automatic control systems are the closer to the properties of ideal systems the lower the value of the time constants of the denominators of transfer functions of differentiators or phase-shift filters. It is also found that the higher the speed of response of an ideal system the lower the tolerable values of time constants of phase-shift filters or differentiators. Orig. art. has: 3 figures and 32 formulas.

SUB CODE: 00, 13 / SUBM DATE: 29Jan64 / ORIG REF: 003

Card 2/2 not

ACC NR: AR7000826

SOURCE CODE: UR/0272/66/000/010/0002/0002

AUTHOR: Taran, V. A.

TITLE: Method of limiting tests for determining reliability parameters of the functional units of a control system

SOURCE: Ref. zh. Metrologiya i izmeritel'naya tekhnika, Abs. 10.32.14

REF SOURCE: Tr. Mosk. in-ta elektron. mashinostr., vyp. 1, 1965(1966), 12-18

TOPIC TAGS: system reliability, automatic control system, test method

ABSTRACT: The principle of the method is explained. The procedure of limiting tests is described for the case of the vibrational load effect. It is noted that the method of testing the limit reliability reveals the "danger" zones. The proposed evaluation of unit failure from exceeding accuracy tolerances and not from mechanical breakdown makes it possible to retain the unit for further tests and to collect large enough statistics on failures for the same number of units. The method can be used for predicting the reliability of a unit under conditions which differ from operational conditions and to plan for the use of the unit in other systems. There are four illustrations and a bibliography of 2 titles. [Translation of abstract]

SUB CODE: 13/4

[DW]

Card 1/1

UDC: 620.179.019.3:62-112

ACC NR: AR7001757

SOURCE CODE: UR/0274/66/000/010/B099/B100

AUTHOR: Taran, V. A.; Brudnik, S. S.; Kusov, I. F.

TITLE: Optimization of tolerances for parameters of a device on condition that the assigned reliability, accuracy and minimum production and operation costs are maintained

SOURCE: Ref. zh. Radiotekhnika i elektrosvyaz', Abs. 10B695

REF SOURCE: Tr. Mosk. in-ta elektron. mashinostr., vyp. 1, 1965(1966), 184-192

TOPIC TAGS: system reliability, industrial production, tolerance optimization, production cost, operation cost, parameter

ABSTRACT: Experience in the development of instruments and various devices has shown that, from the standpoint of reliability and cost, the use of high-precision elements is not justified. Therefore, there arises the problem of the optimization of tolerances for changes in the functional parameters of devices, on condition that the assigned reliability and minimal costs are maintained. The optimization of tolerances for the alternation of the parameters of a closed control

Card 1/2

UDC: 621.396.6.019.3

ACC NR: AR7001757

system consisting of three units (amplifier, actuating mechanism, and feedback element) is investigated. The problem is solved on the basis of the method of linear programming and presupposes the determination of values of industrial tolerances for fluctuations in amplification and transmission factors at which the alternation of these parameters in time under the given operational conditions of the device makes it possible to ensure the required reliability of its operation and, at the same time, minimal production and operational costs. Six illustrations and a bibliography of 2 titles are included. [Translation of abstract]

[DW]

SUB CODE: H09/
1

Card 2/2

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200

201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300

301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400

401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500

501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600

601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700

701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800

801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900

901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100

1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200

1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300

1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400

1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500

1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600

1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700

1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800

1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900

1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000

2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100

2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200


2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300

2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400

2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500

2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600

2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 26

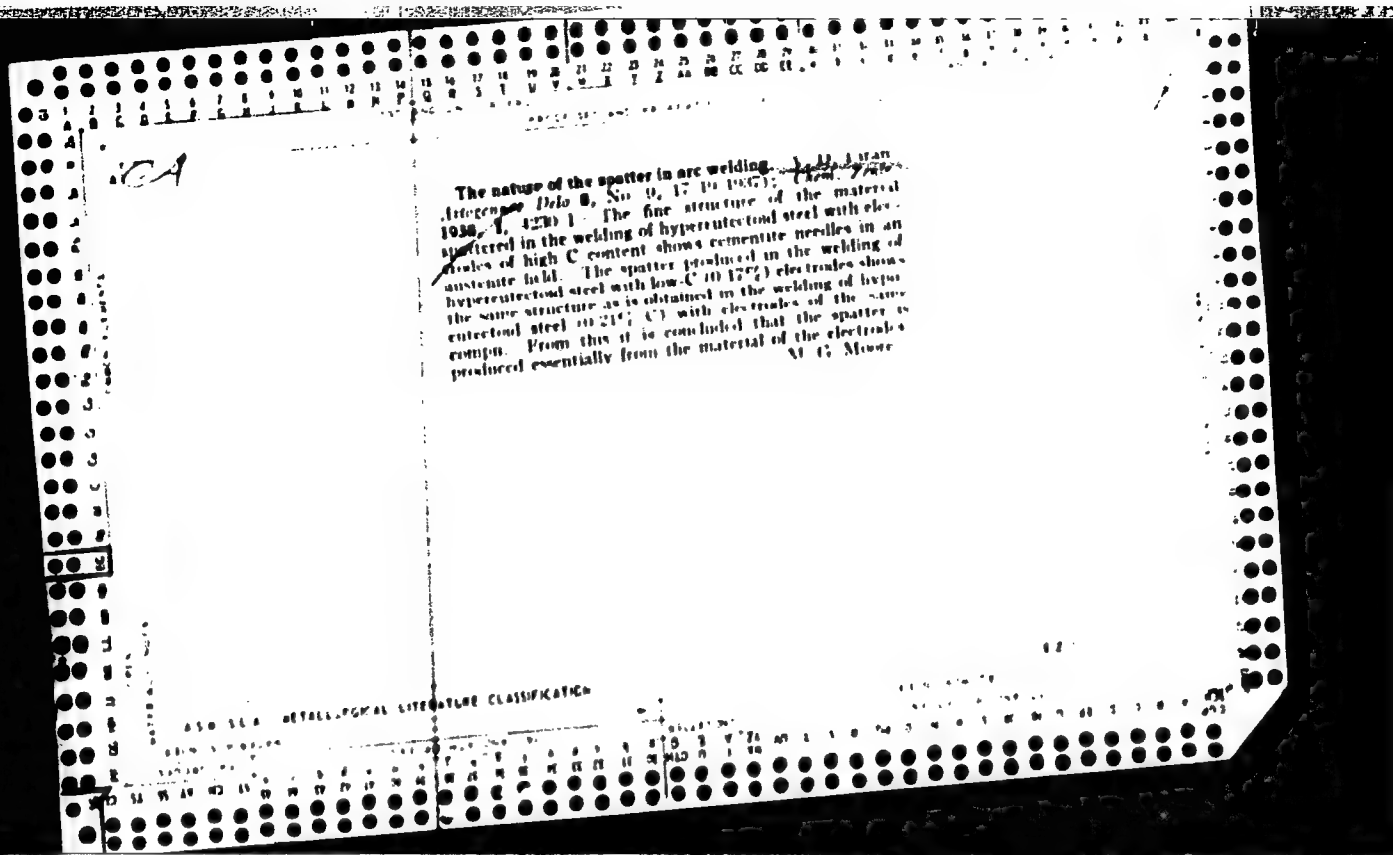

19

Investigation of the Composition of Gases From Arc Welding.
 V. D. Taran. (Zavodskaya Laboratoriya, 1940, No. 7, pp. 785-787). (In Russian). A simple apparatus for analyzing the gases evolved during electric welding is described. The electrodes used are hollow, and thus facilitate the collection of samples of the gas surrounding the arc during actual welding. Analyses of such gas samples obtained from electrodes with different coatings are given. It is pointed out that the volume of gas formed from the electrode coating is several times larger than the volume of the gas sample collected, and there is, therefore, little risk of the sample being contaminated with air.

JK

ASB-51A METALLURGICAL LITERATURE CLASSIFICATION

100000 410 000 000

100000 410 000 000

100000 410 000 000

| 1ST AND 2ND CATEGORIES | | PROCESS AND PROPERTIES INDEX | |
|------------------------|--|------------------------------|--|
| A | | B | |
| C | | D | |
| E | | F | |
| G | | H | |
| I | | J | |
| K | | L | |
| M | | N | |
| O | | P | |
| Q | | R | |
| S | | T | |
| U | | V | |
| W | | X | |
| Y | | Z | |
| AA | | AB | |
| AC | | AD | |
| AE | | AF | |
| AG | | AH | |
| AI | | AJ | |
| AK | | AL | |
| AM | | AN | |
| AO | | AP | |
| AQ | | AR | |
| AS | | AT | |
| AU | | AV | |
| AW | | AX | |
| AY | | AZ | |
| BA | | BB | |
| BC | | BD | |
| BE | | BF | |
| BG | | BH | |
| BI | | BJ | |
| BK | | BL | |
| BM | | BN | |
| BO | | BP | |
| BQ | | BR | |
| BS | | BT | |
| BU | | BV | |
| BW | | BX | |
| BY | | BZ | |
| CA | | CB | |
| CC | | CD | |
| CE | | CF | |
| CG | | CH | |
| CI | | CJ | |
| CK | | CL | |
| CM | | CN | |
| CO | | CP | |
| CQ | | CR | |
| CS | | CT | |
| CU | | CV | |
| CW | | CX | |
| CY | | CZ | |
| DA | | DB | |
| DC | | DD | |
| DE | | DF | |
| DG | | DH | |
| DI | | DJ | |
| DK | | DL | |
| DM | | DN | |
| DO | | DP | |
| DQ | | DR | |
| DS | | DT | |
| DU | | DV | |
| DW | | DX | |
| DY | | DZ | |
| EA | | EB | |
| EC | | ED | |
| EE | | EF | |
| EG | | EH | |
| EI | | EJ | |
| EK | | EL | |
| EM | | EN | |
| EO | | EP | |
| EQ | | ER | |
| ES | | ET | |
| EU | | EV | |
| EW | | EX | |
| EY | | EZ | |
| FA | | FB | |
| FC | | FD | |
| FE | | FF | |
| FG | | FH | |
| FI | | FJ | |
| FK | | FL | |
| FM | | FN | |
| FO | | FP | |
| FQ | | FR | |
| FS | | FT | |
| FU | | FV | |
| FW | | FX | |
| FY | | FZ | |
| GA | | GB | |
| GC | | GD | |
| GE | | GF | |
| GG | | GH | |
| GI | | GJ | |
| GK | | GL | |
| GM | | GN | |
| GO | | GP | |
| GQ | | GR | |
| GS | | GT | |
| GU | | GV | |
| GW | | GX | |
| GY | | GZ | |
| HA | | HB | |
| HC | | HD | |
| HE | | HF | |
| HG | | HH | |
| HI | | HJ | |
| HK | | HL | |
| HM | | HN | |
| HO | | HP | |
| HQ | | HR | |
| HS | | HT | |
| HU | | HV | |
| HW | | HX | |
| HY | | HZ | |
| IA | | IB | |
| IC | | ID | |
| IE | | IF | |
| IG | | IH | |
| II | | IJ | |
| IK | | IL | |
| IM | | IN | |
| IO | | IP | |
| IQ | | IR | |
| IS | | IT | |
| IU | | IV | |
| IW | | IX | |
| IY | | IZ | |
| JA | | JB | |
| JC | | JD | |
| JE | | JF | |
| JG | | JH | |
| JI | | JJ | |
| JK | | JL | |
| JM | | JN | |
| JO | | JP | |
| JQ | | JR | |
| JS | | JT | |
| JU | | JV | |
| JW | | JX | |
| JY | | JZ | |
| KA | | KB | |
| KC | | KD | |
| KE | | KF | |
| KG | | KH | |
| KI | | KJ | |
| KK | | KL | |
| KM | | KN | |
| KO | | KP | |
| KQ | | KR | |
| KS | | KT | |
| KU | | KV | |
| KW | | KX | |
| KY | | KZ | |
| LA | | LB | |
| LC | | LD | |
| LE | | LF | |
| LG | | LH | |
| LI | | LJ | |
| LK | | LL | |
| LM | | LN | |
| LO | | LP | |
| LQ | | LR | |
| LS | | LT | |
| LU | | LV | |
| LW | | LX | |
| LY | | LZ | |
| MA | | MB | |
| MC | | MD | |
| ME | | MF | |
| MG | | MH | |
| MI | | MJ | |
| MK | | ML | |
| MM | | MN | |
| MO | | MP | |
| MQ | | MR | |
| MS | | MT | |
| MU | | MV | |
| MW | | MX | |
| MY | | MZ | |
| NA | | NB | |
| NC | | ND | |
| NE | | NF | |
| NG | | NH | |
| NI | | NJ | |
| NK | | NL | |
| NM | | NN | |
| NO | | NP | |
| NQ | | NR | |
| NS | | NT | |
| NU | | NV | |
| NW | | NX | |
| NY | | NZ | |
| OA | | OB | |
| OC | | OD | |
| OE | | OF | |
| OG | | OH | |
| OI | | OJ | |
| OK | | OL | |
| OM | | ON | |
| OO | | OP | |
| OQ | | OR | |
| OS | | OT | |
| OU | | OV | |
| OW | | OX | |
| OY | | OZ | |
| PA | | PB | |
| PC | | PD | |
| PE | | PF | |
| PG | | PH | |
| PI | | PJ | |
| PK | | PL | |
| PM | | PN | |
| PO | | PP | |
| PQ | | PR | |
| PS | | PT | |
| PU | | PV | |
| PW | | PX | |
| PY | | PZ | |
| QA | | QB | |
| QC | | QD | |
| QE | | QF | |
| QG | | QH | |
| QI | | QJ | |
| QK | | QL | |
| QM | | QN | |
| QO | | QP | |
| QQ | | QR | |
| QS | | QT | |
| QU | | QV | |
| QW | | QX | |
| QY | | QZ | |
| RA | | RB | |
| RC | | RD | |
| RE | | RF | |
| RG | | RH | |
| RI | | RJ | |
| RK | | RL | |
| RM | | RN | |
| RO | | RP | |
| RQ | | RR | |
| RS | | RT | |
| RU | | RV | |
| RW | | RX | |
| RY | | RZ | |
| SA | | SB | |
| SC | | SD | |
| SE | | SF | |
| SG | | SH | |
| SI | | SJ | |
| SK | | SL | |
| SM | | SN | |
| SO | | SP | |
| SQ | | SR | |
| SS | | ST | |
| SU | | SV | |
| SW | | SX | |
| SY | | SZ | |
| TA | | TB | |
| TC | | TD | |
| TE | | TF | |
| TG | | TH | |
| TI | | TJ | |
| TK | | TL | |
| TM | | TN | |
| TO | | TP | |
| TQ | | TR | |
| TS | | TT | |
| TU | | TV | |
| TW | | TX | |
| TY | | TZ | |
| UA | | UB | |
| UC | | UD | |
| UE | | UF | |
| UG | | UH | |
| UI | | UJ | |
| UK | | UL | |
| UM | | UN | |
| UO | | UP | |
| UQ | | UR | |
| US | | UT | |
| UU | | UV | |
| UW | | UX | |
| UY | | UZ | |
| VA | | VB | |
| VC | | VD | |
| VE | | VF | |
| VG | | VH | |
| VI | | VJ | |
| VK | | VL | |
| VM | | VN | |
| VO | | VP | |
| VQ | | VR | |
| VS | | VT | |
| VU | | VV | |
| VW | | VX | |
| VY | | VZ | |
| WA | | WB | |
| WC | | WD | |
| WE | | WF | |
| WG | | WH | |
| WI | | WJ | |
| WK | | WL | |
| WM | | WN | |
| WO | | WP | |
| WQ | | WR | |
| WS | | WT | |
| WU | | WV | |
| WW | | WX | |
| WY | | WZ | |
| XA | | XB | |
| XC | | XD | |
| XE | | XF | |
| XG | | XH | |
| XI | | XJ | |
| XK | | XL | |
| XM | | XN | |
| XO | | XP | |
| XQ | | XR | |
| XS | | XT | |
| XU | | XV | |
| XW | | XX | |
| XY | | XZ | |
| YA | | YB | |
| YC | | YD | |
| YE | | YF | |
| YG | | YH | |
| YI | | YJ | |
| YK | | YL | |
| YM | | YN | |
| YO | | YP | |
| YQ | | YR | |
| YS | | YT | |
| YU | | YV | |
| YW | | YX | |
| YY | | YZ | |
| ZA | | ZB | |
| ZC | | ZD | |
| ZE | | ZF | |
| ZG | | ZH | |
| ZI | | ZJ | |
| ZK | | ZL | |
| ZM | | ZN | |
| ZO | | ZP | |
| ZQ | | ZR | |
| ZS | | ZT | |
| ZU | | ZV | |
| ZW | | ZX | |
| ZY | | ZZ | |

Electric Welding with Series-Fed Arcs. V. D. Taron. 9 pages. Henry Bratcher, Altadena, Calif. (Translation No. 1966.) From *Avances Delo*, v. 17, nos. 3-4, 1966, p. 16-18.

Describes an arc-welding process, both hand and automatic, that uses two series-fed arcs at the same time, boosting the operating efficiency and reducing the hardness and cracking of the affected zone.

| | | | | | |
|--|--|------------------------------|--|-------------------|--|
| 1ST AND 2ND CODES | | PROCESS AND PROPERTIES INDEX | | 3RD AND 4TH CODES | |
| <div style="display: flex; justify-content: space-between;"> B 7 </div> <p>*387. Welding Under Subzero Temperature Conditions. (In Russian.) V. D. Taran. <i>Autogennoe Dolo</i> (Welding), Sept. 1947, p. 12-17.</p> <p>Gives results of investigation of a series of weld failures in which the welding was done under sub-zero conditions. Includes a table of chemical and mechanical properties of metal from welds which failed, and a number of diagrams. Recommends testing at room temperature and at -45°C. to establish quality. Cites need for research on the problem.</p> | | | | | |
| METALLURGICAL LITERATURE CLASSIFICATION | | | | | |
| SOURCE COUNTRY | | SOURCE NUMBER | | SOURCE DATE | |
| 1947 | | 12-17 | | 1947 | |

3237. PROTECTION OF STEEL FROM HYDROGEN SULPHIDE CORROSION. ~~Y. P. Anreider, G. K. and Gaskiyev, G. A.~~ (Trud. Mosk. Kolt. Inst. (Inzh. ~~Ucheb. Inst.~~), 1955, (12), 231-234; abstr. in Ref. Zh. Khim. (Ref. J. Chem., Moscow), 1955, (16), 3040. Samples of Soviet St. 2 steel, coated with aluminum and anodized were three times as resistant to corrosion at 600°C as the same steel uncoated, and twice as resistant as the same steel with an unanodized coating.

Prof, Dr. Tech Sci

②
Df

TARAN, V. D.

The Committee on Stalin Prizes (of the Council of Ministers USSR) in the fields of science and inventions announces that the following scientific works, popular scientific books, and textbooks have been submitted for competition for Stalin Prizes for the years 1952 and 1953. (Sovetskaya Kultura, Moscow, No. 22-40, 20 Feb - 3 Apr 1954)

| <u>Name</u> | <u>Title of Work</u> | <u>Nominated by</u> |
|--------------|--|--|
| Taran, V. D. | "Technology of Welding and Assembly of Mains and Cisterns" | Moscow Petroleum Institute imeni Acad I.M. Gubkin |

SO: W-30604, 7 July 1954

TARAN, V.D., doktor tekhnicheskikh nauk; POLUMINA, M.A., inzhener.

Licorice compound for testing welded seams of storage tanks for
tightness. Rats. 1 izobr. predl. v stroi. no.1.3:29-31 '55.
(Tanks--Welding) (MIRA 9:4)

TARAN V.D. professor doktor tekhnicheskikh nauk; BEREZIN, V.L., kandidat tekhnicheskikh nauk.

Study of characteristics of electric butt welds. Stroi.pred.neft.prom.
1 no.2:13-17 Ap '56. (MIRA 9:9)
(Electric welding) (Petroleum--Pipelines)

USSR / Phase Conversions in Solids.

E-5

Abs J_{ur} : Ref Zhur - Fizika, No 4, 1957, No 9284

Author : Taran, V.D., Skugorova, L.P.

Title : Rate of Growth of the Diffusion Layer When Boriding Steel.

Orig Pub : Fiz. metallov i metallovedeniye, 1956, 3, No 1, 66-69

Abstract : An investigation is made of the rate of growth of the boride layer, obtained from low-alloy structural steels 30KhGSZ, 12KhN2A, and 40Kh and carbon steel type 35. It is shown that the change in the thickness of the borided layer is in close enough agreement with the rate of growth of the diffusion layer. The heat of breakup Q and the factor B_0 ahead of the exponent, which characterize the speed of diffusion of the boron in the investigated steel, depend to a considerable extent on the chemical composition of the steel. The values of the heat of breakup and of the factor ahead

Card : 1/2

USSR / Phase Conversions in Solids.

E-5

Abs Jour : Ref Zhur - Fizika, No 4, 1957, No 9284

Abstract : of the exponent are determined for the 30KhGSA, 12KhN2A, 40Kh, and 35 steels. Approximate formulas are obtained for the speed of diffusion of the born in the investigated steels as functions of the temperature.

Card : 2/2

SOV/137-57-1-1146

Translation from: Referativnyy zhurnal. Metallurgiya, 1957, Nr 1, p 135 (USSR)

AUTHORS: Taran, V. D., Skugorova, L. P.

TITLE: Hardening of the Supports of Drilling Bits by Boronizing (Uprochneniye opory burovyykh dolot metodom borirovaniya)

PERIODICAL: Tr. Mosk. neft. in-t, 1956, Nr 16, pp 125-134

ABSTRACT: A report on the successful employment of electrolytic boronizing (B) for hardening of the supports of drilling bits (the shank of the claw). Investigations were carried out on steels of the types 40Kh, 30KhGSA, and 12KhN2A. It is shown that the wear resistance of boronized steels is significantly greater than that of case-hardened steel. Experimental B was conducted in a bath of molten crystalline borax $N_2B_4O_7 \cdot 10 H_2O$ in an electric crucible furnace; the anode was in the form of a carbon electrode while the article being treated served as the cathode. The optimal temperature of B of the steels investigated is 950-980°C, the current density 0.25 a/cm². The depth and quality of the diffusion layer are functions of the exposure time during B. The depth of the diffusion layer does not increase significantly if B is carried beyond the

Card 1/2

SOV/137-57-...046

Hardening of the Supports of Drilling Bits by Boronizing

period of six hours; at the same time, the diffused layer becomes brittle and exhibits a tendency toward peeling.

E S

Card 2/2

TARAN, V.D., professor; SKUGOROVA, L.P.

Determining operating characteristics of drill bit pin mounts in
models. Trudy MNI no.16:135-147 '56. (MLRA 9:10)

(Boring machinery)

TARAN, V. D.

"Application of Radioactive Isotopes to the Construction and Operation of Petroleum and Gas Pipelines," Utilization of Radioactive Isotopes & Emanations in the Petroleum Industry (Symposium), Min. Petroleum Industry USSR, 1957.

Results of the Joint Session of the Technical Council of Min of the Petroleum Industry USSR and Soviet Sci. and Technical Association, Moscow 14-19 Mar 1956.

TARAN, V. D.,

Taran, V. D., and L. P. Skugorova "Behaviour of a Boronized Surface Under Conditions of Dynamic-Impact "

Problems of Petroleum Production and Petroleum Engineering, Moscow, Neftyanoy institut, Gostoptekhnizdat, 1957, 393pp. (Trudy vyp. 20)
This book is a collection of articles written by professors and faculty members of the Petroleum Inst. in I. M. Gubkin.

TARAN, V.D., prof., doktor tekhn.nauk; SKUCOROVA, L.P., kand.tekhn.nauk

Behavior of borated surfaces under cone bit impact loads. Izv.
MII no.20:146-153 '57. (MIRA 13:5)

(Boring machinery)

I 5500, 0, 15.
DUDA, R.I., inzhener (Moskva); LIVSHITS, L.S., kandidat tekhnicheskikh nauk (Moskva); TARAN, V.D., doktor tekhnicheskikh nauk (Moskva); PAL'KEVICH, A.S., kandidat tekhnicheskikh nauk (Moskva).

Investigating sheet steel for reservoirs. Stroi. pred.neft.prom.
2 no.1:13-16 Ja '57. (MLRA 10:3)
(Petroleum--Storage) (Plates, Iron and steel)

TACAN, U. D.

Distr: 4E2c

18
✓ Strengthening by Bortling the Working Surface of Low Alloy Steels / V. D. TATIN and L. P. Kuznetsova. (Vestnik ~~inzhiniringa~~ stroeniya, 1967, 10, 62-66). Experiments on three marks of steel 20 X 08 A, 12 X N 2 A and 40 X are described. Results show that the most suitable temperature for the operation is between 920 and 950° and its duration 6 h. This assures the highest resistance of the surface. Under the same conditions steel 12 X N 2 A gives the best results.

7
11
RG

059

AUTHORS: Taran, V. D., Dr. Tech. Sc. Prof. and Skugorova, L.P.,
Candidate of Technical Sciences.

TITLE: Surface borating of low alloy steels. (Poverkhnostnoye
borirovaniye nizkolegirovannykh staley).

PERIODICAL: "Metallovedenie i Obrabotka Metallov" (Metallurgy and
Metal Treatment), 1957, No.6, pp.43-47 (U.S.S.R.)

ABSTRACT: So far most Russian work on this subject (1-3) has
related to borating of iron and carbon steels.
Kontorovich, I. Ye and L'vovsky, M.Ya.⁽⁴⁾ studied the
influence of certain alloying elements on the
formation and properties of the diffusion layer during
borating. Blanter, M.Ye and Besedin, N.P.⁽⁵⁾ studied
the influence of alloying elements on the depths of
penetration of the boron into the iron and the heat
of formation of the diffusion layer. The aim of the
here described investigations was to study the
structure and the properties of the borated layer
obtained on several low alloy structural steels.
Standard specimens of the low alloy steels 12XH2A,
12XH3A, 30XPCA, 55C2A, 40X, and for comparison
specimens of the carbon Steel 35, were used, the
analyses of which are given in Table 1, p.43. The
thermochemical treatment was effected in an electro-
lytic bath of molten borax, the specimens being used
as cathodes, inside stainless steel crucibles with a

Card 1/3

Surface borating of low alloy steels. (Cont.) 659
 current density of 0.20 to 0.25 A/cm². The influence is discussed of the anode material, of the bath temperature, of the process of duration and of the chemical composition of the steel on the depth of the borated layer. The structure and the hardness of the borated layer are also discussed. The authors conclude that the quality of the borated layer forming on the investigated steels depends on the temperature of the electrolytic bath during the process and on the duration of the process; if the duration exceeds six hours and the bath temperature exceeds 950 C, the borated layer will become brittle. On the basis of microstructural analysis the optimum technological regime of electrolytic borating of the investigated steels is 950 C with a duration of six hours. The hardness of the borated layer is higher for the investigated low alloy steels than it is for the carbon Steel 35. The microhardness of the surface phase of some of the investigated borated low alloy steel specimens reached up to 2500 kg/mm². Fig.1 shows the general arrangement of the test set-up; the graph, Fig.2, shows the dependence of the thickness of the borated layer on the bath temperature for a process duration of four hours; microphotos, Figs.3-6 show the structure of the borated layer of three low

Surface borating of low alloys steels. (Cont.)
alloy steels and of one carbon steel. 6 figures,
2 tables and 6 Slavic references.

659-

ASSOCIATION: Moscow Oil Institute imeni I. M. Gubkin.
(Moskovskiy Neftyanoy Institut imeni I.M.Gubkina).

AVAILABLE:

Card 3/3

DUDA, R.I.; TARAN, V.D.; PAL'KEVICH, A.S.; LIVSHITS, L.S.

~~Secret~~
High-level capacity of steel tanks in the winter. Neft.khoz. 35
no.2:51-56 P '57. (MLRA 10:3)
(Petroleum--Storage)

122-5-22/35

AUTHORS: Taran, V.D. (Dr.Tech.Sc., Professor) and Skugorova, L.P.,
(Cand.Tech.Sc.)

TITLE: The Hardening of Rubbing Surfaces in Low Alloy Steels by
Boron Treatment. (Uprochneniye borirovaniyem trushchikhsya
poverkhnostey nizkolegirovannykh staley)

PERIODICAL: Vestnik Mashinostroyeniya, 1957,³⁷Nr 5, pp.62-65 (USSR)

ABSTRACT: The known information on boron treatment is briefly re-
viewed. A Vickers hardness of 2000 is achieved at the sur-
face, maintained even after repeated heating to 950°C. Res-
istance against acids and heat resistance up to 800°C are
claimed. A wear resistance exceeding that of nitrided sur-
faces has been observed. A study of electrolytic boron
treatment is reported. After melting of borax ($\text{Na}_2\text{B}_4\text{O}_7$), in
a stainless steel crucible, a carbon (or graphite) anode and
the workpiece cathode are immersed in the bath. The electro-
chemical processes are discussed resulting in the formation
of boron which diffuses into the metal producing iron borides,
boron carbides and oxygen escaping into atmosphere. The au-
thors have established that the boron enriched layer grows
with a rise in temperature up to 950°C. Relations between
thickness and exposure are given. Beyond eight hours'

Card 1/2

122-5-22/35

The Hardening of Rubbing Surfaces in Low Alloy Steels by Boron Treatment.

exposure a sharp increase in brittleness is observed. Wear tests were set-up in a lathe. A specimen was fixed to the tail stock and burnished by rollers of 10 mm diameter, 20 mm length, 150 rpm under 20 kg load. A cam device produced periodic impacts with a total energy of 8400 kgcm per minute. Specimens with about 1% chromium were tested (namely: steel 30X1CA with 0.25% C, 0.99% Mn and 1.05% Si, steel 12XH2A with 0.15% C, 0.44% Mn and about 2% Ni, and steel 400X with 0.42% C, 0.69% Mn and 0.25% Si). The wear resistance was judged by the loss of weight measured at 15 minute intervals. Comparison of wear graphs (reproduced) showing variations of steel composition, treatment temperature and treatment duration shows that the best treatment temperature is 920-950°C, the best exposure six hours and the best steel composition is the low carbon, Ni-Cr steel, 12XH2A. There are 5 figures, comprising 4 graphs and 2 tables, and 6 Slavic references.

AVAILABLE: Library of Congress.

Card 2/2

KUZMAK, Ye.M., prof. doktor tekhn. nauk, red.; TARAN, V.D., prof., doktor tekhn. nauk, red.; ZHIGACH, K.P., prof., red.; MURAV'YEV, I.M., prof., red.; TIKHOMIROV, A.A., kand. ekon. nauk, red.; YEGOROV, V.I., kand. ekon. nauk, red.; CHARYGIN, M.M., prof., red.; DUNAYEV, F.P., prof., red.; CHERNOZHUKOV, N.I., prof., red.; CHARNYY, I.A., prof., red.; PANCHENKOV, G.M., prof., red.; DAKHNOV, V.N., prof., HAMETKIN, N.S., doktor khim. nauk, red.; ALMAZOV, N.A., dots., VINOGRADOV, V.N., kand. tekhn. nauk, red.; BIRYUKOV, V.I., kand. tekhn. nauk, red.; TAGIYEV, E.I., red.; GUREVICH, V.M., red.; GOR'KOVA, A.A., ved. red.; FEDOTOVA, I.G., tekhn. red.

[Proceedings of the conference of technical schools on the problems of new equipment for the petroleum industry] Moshvuzovskoe soveshchanie po voprosam novoi tekhniki v neftianoi promyshlennosti. 1958. materialy... Moskva, Gos. nauchno-tekhn. izd-vo nef. i gorno-toplivnoi lit-ry. Vol. 3. [Manufacture of petroleum industry equipment] Neftianoe mashinostroenie. 1958. 222 p. (MIRA 11:11)
(Petroleum industry--Equipment and supplies)

TARAN, V.D.; SKUGOROVA, L.P.

Testing the durability of borated race ways of roller bit supporting
shanks. Izv. vys. ucheb. zav.; neft' i gaz no.2:113-118 '58.
(MIRA 11:8)

1. Moskovskiy neftyanoy institut im. akad. I.M. Gubkina.
(Boring machinery)

SOV/137-58-10-21616

Translation from: Referativnyy zhurnal, Metallurgiya, 1958, Nr 10, p 166 (USSR)

AUTHORS: Taran, V.D., Lipilin, I.P.

TITLE: Investigation and Selection of Novel Types of Steel for Drilling Bits (Issledovaniye i vybor novykh staley dlya burovnykh dolot)

PERIODICAL: Materialy Mezhvuz. nauchn. soveshchaniya po vopr. novoy tekhn. v neft. prom-sti, 1958, Vol 3, pp 97-110

ABSTRACT: Research was performed on novel types of high-strength steel containing no expensive or scarce alloying elements. Two groups of steel were tested: 1) Steels containing 0.15-0.35% C (18KhGT, 20Kh, 20KhNZ, 30KhGS); 2) steels containing 0.28-0.55% C (30KhGS, 40KhN, 50KhGS). Investigations were carried out on specimens the size and shape of which corresponded to the cutting teeth in the central jaws (rollers) of a ZK-12 drilling bit. The specimens were subjected to impact tests as well as tests on impact wear. Best results were achieved with steels 20KhNZ and 30KhGS. Since steel 30KhGS does not contain any scarce elements, it was adopted for manufacture of drilling bits. After quenching and tempering operations at temperatures of 880°C and 250°C, respectively, the steel

Card 1/2

SOV/137-58-10-21616

Investigation and Selection of Novel Types of Steel for Drilling Bits

30KhGS possesses a σ_b of 185 kg/mm², a σ_s of 179 kg/mm², and an a_k of 8.3 kgm/cm². The structure of a carburized layer of steel 30KhGS is normal, i.e., it does not contain any carbide network and is free of large carbide inclusions. Laboratory and shop tests revealed the advantages of steel 30KhGS over the steels 18KhGT and 12KhN2. The authors emphasize the need for further research on methods of heat treatment of jaws made of 30KhGS steel.

I.B.

1. Drills--Materials
2. Steel--Applications
3. Steel--Properties
4. Drilling machines--Equipment

Card 2/2

SOV/137-58-3-17411

Translation from: Referativnyy zhurnal, Metallurgiya, 1958, Nr 9, p 181 (USSR)

AUTHORS: Taran, V.D., Skugorova, L.P.

TITLE: Boriding as a Method for Toughening the Bearings of Milling-machine Cutters (Borirovaniye kak sposob uprochneniya opory sharoshechnykh dolot)

PERIODICAL: Materialy Mezhdvuz. nauchn. soveshchaniya po vopr. novoy tekhn. v nef. prom-sti, 1958, Vol 3, pp 156-163

ABSTRACT: Investigation of the effect of the fundamental factors of the process of boriding (B) (anode material, composition of the bath, temperature, duration of B, and chemical composition of the material) on the thickness and quality of the borided layer (BL) and also of the microstructure and hardness of BL was conducted on 12KhN2A, 12KhN3A, 30KhGSA, 40Kh, 55S2A, and St. 35 grades of steel. B was carried out at 850, 950, 1000, and 1100°C for durations of 4, 6, 8, and 12 hours. It was discovered that BL increases considerably upon an increase of temperature only up to 950-1000°C; at more elevated temperatures BL becomes brittle. The BL of 30KhGSA-grade

Card 1/2

SOV/137-58-9-19411

Boriding as a Method for Toughening the Bearings of Milling-machine (cont.)

steel is the thickest, that of 40Kh-grade steel the thinnest. The typical structure of the BL of the structural steels investigated (B at 950° for 4 hours) consists of acicular dendrite crystals oriented perpendicularly to the surface of the specimen. By means of testing on the stand of the working properties of BL on specimen-models applicable to the working conditions of a large roller race of the bearing for a triple milling cutter, the optimum conditions for B were established: Temperature 920-950°, soaking 6 hours. The wear resistance of borided specimens is 60% higher than that of the carburized ones and 12 times higher than the wear resistance of quenched specimens. It is recommended that the bearings of drilling cutters be borided to increase the strength of the friction surfaces.

A.B.

1. Machine tools--Equipment 2. Bearings--Processing 3. Metal coatings
--Applications 4. Borides

Card 2/2

NOV-1958-11-5 81

AUTHORS: Taran, V.D., Doctor of Technical Sciences, Professor; Politskiy, N.V., Engineer; Fal'kevich, A.B., Candidate of Technical Sciences, and Neyfel'd, I.Ye., Engineer

TITLE: An Investigation of Pipe Pressure-Welding Process (Issledovaniye protsessy pressovoy svarki trub)

PERIODICAL: Svarochnoye proizvodstvo, 1958, Nr 11, pp 12-14 (USSR)

ABSTRACT: There is no exact information available on the processes of seam formation in the pressure welding of pipe butts. VNIIST carried out experiments together with the Chair of Metal Study of the Moscow Oil Institute imeni I.M. Gubkin, relating to the study of the pressure welding process under a plastic condition with the use of radioactive isotopes. "Marked atoms" were used to determine the correctness of one of the two existing hypotheses on the formation of weld joints, and to solve the problem of iron-atom diffusion and changes of properties in weld joints by subsequent heat treatment. Microautoradiography was used to investigate the diffusion processes in metal. The following conclusions are made:

Card 1/2 1) The penetration of grains through the border dividing the

An Investigation of Pipe Pressure-Welding Process

007-135-55-11-5 001

parts being welded does not take place. 2) Weld joints have a non-diffusion character and common grains on the border are formed by the drawing together of surface grain atoms. 3) Subsequent heat treatment of pressure-welded low-carbon steel proved inefficient. Further investigation on the use of other radioactive isotopes in the pressure-welding process is recommended.

There are 2 tables, 1 graph, 2 diagrams, 3 sets of micro-photos and 7 references, 2 of which are English and 5 Soviet.

ASSOCIATIONS: Moskovskiy neftyanoy institut (Moscow Petroleum Institute)
VNIIST Glavgaz SSSR (VNIIST of Glavgaz USSR)

1. Pipes—Welding 2. Metals—Diffusion 3. Radioisotopes—
Applications 4. Welds—Autoradiography

Card 2/2

TARAN, V.D., prof., doktor tekhn.nauk; SHREYBER, O.K., dotsent, kand.
tekhn.nauk; SKUGOROVA, L.P., kand.tekhn.nauk; SAAKIYAN, L.S.,
assistant, kand.tekhn.nauk; DUDA-ZAKSON, R.I., kand.tekhn.nauk;
POLPEROV, A.P., inzh., starshiy prepodavatel'.

[Studying the materials used in the petroleum industry] Neftianoe
materialovedenie. Pod obshchei red. V.D.Tarana. Moskva, Mosk.
in-t neftekhim. i gazovoi promyshl. Pt.1. [Steel and cast iron]
Stali i chuguny. 1959. 179 p. (MIRA 13:1)
(Steel) (Cast iron)

TARAN, Vladimir Deomidovich, prof., doktor tekhn.nauk; SHAKHMAIEVA,
Ye.A., vedushchiy red.; PEDOTOVA, I.G., tekhn.red.

[Techniques of welding and assembling pipelines] Tekhnologiya
svarki i montazha magistral'nykh truboprovodov. Moskva, Gos.
nauchno-tekhn.isd-vo neft. i gorno-toplivnoi lit-ry, 1960.
361 p.

(Pipelines)

(MIRA 13:3)

18.7400

77153

SOV/129-60-1-1/22

AUTHORS: Taran, V. D. (Doctor of Technical Sciences, Professor),
Skugorova, L. P. (Candidate of Technical Sciences)

TITLE: Boronating Steel With Galvanic Coating

PERIODICAL: Metallovedeniye i termicheskaya obrabotka metallov, 1960,
Nr 1, pp 2-5 (USSR)

ABSTRACT: The authors investigate the effects of boronating nickel-
and copper-coated steel. It is known that boron does
not dissolve in nickel and merely forms borides, while
no data are available on the interaction of boron and
copper. Sequence of tests: 15 mm high steel 35 and 50
specimens (0.35 and 0.50% C, respectively) with 10 and
15 mm diam were used. (1) Nickel-plated specimens were
boronated at 950 to 960° C for 60, 90, and 120 min, as
well as for 4 hours. Microstructural analysis revealed
that the nickel layer did not impede the penetration of
boron. The boronated layer of nickel-plated specimens
was found to have the same structure as in regular steel
specimens. The authors assume this to be a result of

Card 1/4

Boronating Steel With Galvanic Coating

77153

SOV/129-60-1-1/82

the reaction between elementary boron and nickel, which leads to the formation of an integral diffusion layer. Microhardness of the boronated layer measured with a 100 g load exceeded 1,500 kg/mm². The wide range of changes in the microhardness of tested specimens testifies to the inhomogeneity of the boronated layer. Increases in the thickness of the nickel layer (0.008 to 0.036 mm) failed to produce a heavier boronating layer. (2) Copper-plating was carried out in H₂SO₄ electrolyte. Microstructural analysis revealed the absence of any reaction between elementary boron and the copper layer. The latter impedes the penetration of boron. Occasional penetration is due to inadequate Cu-layer thickness or the presence of cracking and other imperfections. The authors found that a copper layer with maximum thickness of 0.10 mm leads to the formation of a considerably thinner boron sublayer. Microhardness of the sublayer varied from 1,000 to 1,600 kg/mm², and that of the copper layer from 80 to 140 kg/mm². Boronating had no effect on the hardness of

Card 2/4

Boronating Steel With Galvanic Coating

77153

SOV/129-60-1-1/22

the copper layer. The depth of penetration of boron into steel 50, as it depends on the thickness of the copper layer during boronating for 2 hours at 950 to 960° C, is shown in Fig. 5.

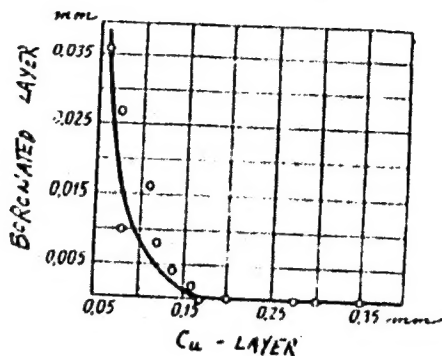


Fig. 5. Relationship curve of the depth of B penetration into steel 50 on the thickness of Cu-layer.

Card 3/4

Boronating Steel With Galvanic Coating

77153

304/189-60-1-1/22

Boron diffusion was completely arrested by increases in the thickness of the copper layer (over 0.1 mm). In recommending the use of galvanic copper-plating as a local protection during boronating, the authors emphasize the importance of having an adequately heavy sound copper layer. The boronating of Cu-Zn and Cu-Sn alloys revealed neither brass nor bronze to be susceptible to boronating. There are 7 figures; 1 table; and 6 Soviet references.

ASSOCIATION: Moscow Petroleum Institute imeni I. M. Gubkin, Academician (Moskovskiy neftyanoy institut imeni Akad. I. M. Gubkina)

Card 4/4

S/123/60/100/10/11-
A005/A001

Translation from: Referativnyy zhurnal, Mashinostroyeniya, 1960, No. 24, p. 641,
137250

AUTHORS: Taran, V.D., Saakiyan, L.S.

TITLE: The Effect of the Grain Size on the Corrosion Resistance of an
Anodized Surface

PERIODICAL: Tr. Mosk.in-ta neftekhim. i gaz. prom-sti, 1960, No.28, pp. 174-178

TEXT: The authors report on investigations conducted by the Moskovskiy Institut Neftekhimii i gazovoy promyshlennosti (МНИХ и ГИ) (Moscow Institute of Petroleum Chemistry and Gas Industry, MINKh and GP). It turned out that the natural corrosion resistance of aluminum in sulfurous petroleum and petroleum products can be considerably increased by anodizing, which consists in a relatively simple electrochemical treatment of its surface being covered with an oxide layer. The investigation results showed that the resistance of the anodized aluminum in a hydrogen sulfide medium at 300 and 500°C was not inferior to that of stainless steel. By choosing the appropriate parameters of anodizing, a layer of various

Card 1/2